

Techtrol Compact Displacer Level Switch for Water "CDS"

It is a cost effective level switch for pump control of water in storage tanks under atmospheric conditions.

Construction and Operation

It consists of two suitably spaced displacers suspended through a rope and connected to a coupler rod carrying an actuator for switch on-off operation.

Rising Water Level: on reaching at L1 (High Level), the top displacer gets immersed in the water and resultant buoyant force causes the actuator to move upward to actuate the microswitch.

Falling Water Level : on reaching at L2 (Low Level), the reduced buoyant force lowers the actuator to release the microswitch.

The control range required for specific applications can be set by adjusting the spacing between displacers to relocate them at the desired position on the rope.

Specifications

Enclosure : PP, weather proof

Range : 0.5 m to 3 m (max)

Switch Element : Microswitch

Contact Type & Rating : 1 x SPDT, 5A, 250VAC

Displacer : Ø50 x PP (2 nos)


Rope MOC : PP


Process Connection : PP, Square flange cum

bracket

Operating Temperature : 0 to 70°C

Operating Pressure : Atmospheric



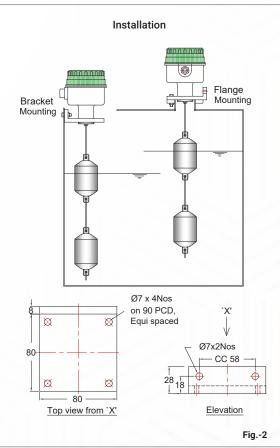



Installation

The switch can be either flange mounted on tank top or bracket mounted on tank side wall. Customary precautions should be taken to ensure tank internals do not restrict the displacer movement and the switch is mounted away from the inlet & outlet of tank flow to minimize the effects of turbulence & suction respectively.

Termination & wiring

To activate pump on-off control during tank fill and drain operation.

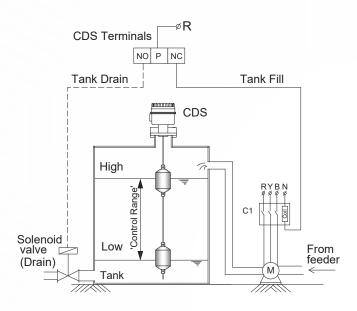


Fig.-3

Applications

Sumps, overhead, storage, process, dosing tanks in Utilities, WTP, STP and ETP.

All dimensions in mm except specified





Regd. & Sales: S-18, MIDC Bhosari, Pune - 411026, India +91-20-66342900 | ho@punetechtrol.com

Works: J-52/7, MIDC Bhosari, Pune - 411026, India +91-20-67313600 | **www.punetechtrol.com** ♀

